


MASTER PRO

450 mm C/R



Características Técnicas.

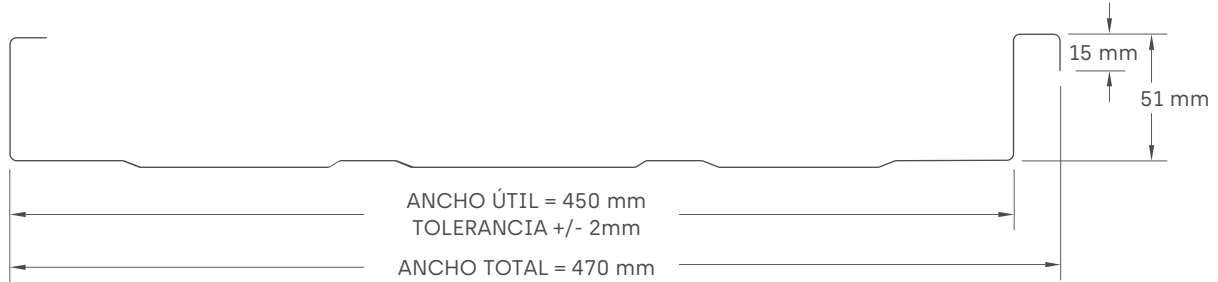

INFORMACIÓN TÉCNICA MASTER PRO (450mm)				
Espesor [e] [mm]	Peso [kg/m]	Separación entre apoyos [m]	Carga viva [kg/m ²]	Recubrimiento
0.40	1.82	1.25	91.13	Gavalume / Prepintado
		1.30	84.02	
		1.42**	70.00**	
0.45	2.06	1.25	111.25	Gavalume / Prepintado
		1.42	85.53	
		1.56**	70.00**	
0.50	2.29	1.42	102.57	Gavalume / Prepintado
		1.56	84.00	
		1.70**	70.00**	
0.60	2.77	1.56	115.05	Gavalume / Prepintado
		1.70	95.98	
		1.98**	70.00**	
0.65	3.10	1.70	115.05	Gavalume / Prepintado
		1.98	95.98	
		2.78**	70.00**	

*PESOS RECOMENDADOS SEGÚN LA NEC-SE-CG (2015)

VENTAJAS	USOS Y APLICACIONES
<ul style="list-style-type: none"> Fabricación a medida Variedad de colores Fácil instalación y manejo Traslape cosido mecánicamente Hermetización garantizada Para cubiertas de baja pendiente 	<ul style="list-style-type: none"> Cubiertas rectas o curvas Galpones Almacenes Residencias Tumbados Fachadas

DETALLES DE FIJACIÓN

TIPO DE PERNO	DENSIDAD
● Perno coínco (fijación clip simple)	2.8 unid x m ²

*Densidad para distanciamiento de correas de 1.42 m

DETALLE DE TRASLAPE

