


# Perfiles Estructurales

## Geometría "C"



Con mayor Resistencia



Medidas Exactas






Conformación Perfecta



De fácil Instalación

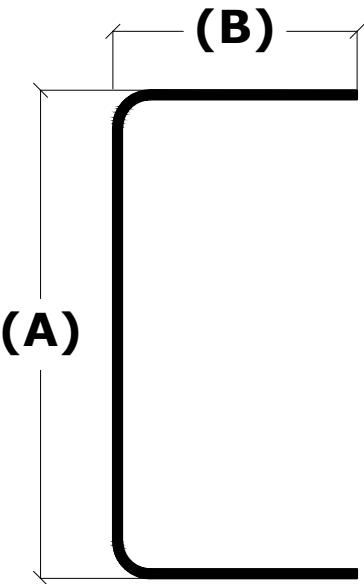

| Grado estructural: ASTM GRADO 36<br>Tipo de material: Acero base laminado en caliente sin recubrimiento |             |            |           |
|---------------------------------------------------------------------------------------------------------|-------------|------------|-----------|
| Espesor (mm)                                                                                            | Alma (mm) A | Ala (mm) B | Peso (kg) |
| 1,50                                                                                                    | 50          | 25         | 6,55      |
|                                                                                                         | 80          | 40         | 10,92     |
|                                                                                                         | 100         | 50         | 13,83     |
| 1,80                                                                                                    | 50          | 25         | 7,86      |
|                                                                                                         | 80          | 40         | 13,10     |
|                                                                                                         | 100         | 50         | 16,59     |
| 2,00                                                                                                    | 50          | 25         | 8,73      |
|                                                                                                         | 80          | 40         | 14,55     |
|                                                                                                         | 100         | 50         | 18,43     |
|                                                                                                         | 125         | 50         | 20,86     |
|                                                                                                         | 150         | 50         | 23,29     |
| 3,00                                                                                                    | 200         | 50         | 28,14     |
|                                                                                                         | 80          | 40         | 21,54     |
|                                                                                                         | 100         | 50         | 27,36     |
|                                                                                                         | 125         | 50         | 31,00     |
|                                                                                                         | 150         | 50         | 34,64     |
|                                                                                                         | 200         | 50         | 41,92     |

| Ventajas                                                                                                                                                                                                                                      | Usos y Aplicaciones                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• Livianos</li> <li>• Ahorro de estructura</li> <li>• Compatibles con diferentes sistemas constructivos</li> <li>• Geometría uniforme</li> <li>• Longitudes estándar y fabricación a medida</li> </ul> | <ul style="list-style-type: none"> <li>• Pórticos</li> <li>• Cerchas</li> <li>• Columnas</li> <li>• Vigas</li> <li>• Pilares de soporte</li> <li>• Aplicaciones industriales</li> </ul> |



Según Normas ISO 14040:2006,  
ISO 14044:2006 y  
UNE-EN 15804:2012+A1 2014